




Halla Xpress

The most sought-after
luminaires in stock

Huge	02
Rundo	03
Lina45-S	04
Lipo35-S	05
Lipo60-S	06
Ture	07
Ravo	08
Vali80-T	09

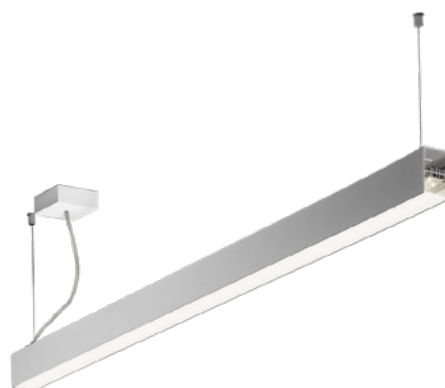

Huge



Name	Picture	Code	Colour	Light distribution	Colour Temperature	Luminous flux	Colour rendering index Ra	Dimensions	Type of optical system	Connection	Power (W)	Additional information	EAN
Huge		191-240K-10GGEI/830, W	White	Direct	3000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 87 mm	Opal diffuser	ON/OFF - Multiwatt	8,1 - 30,2W	 	8596073433170
		191-240K-10GGEI/840, W	White	Direct	4000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 87 mm	Opal diffuser	ON/OFF - Multiwatt	7,7 - 29,1 W		8596073433187
		191-240K-10GGEI/830, B	Black	Direct	3000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 87 mm	Opal diffuser	ON/OFF - Multiwatt	8,1 - 30,2W		8596073433330
		191-240K-10GGEI/840, B	Black	Direct	4000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 87 mm	Opal diffuser	ON/OFF - Multiwatt	7,7 - 29,1 W		8596073433347
		191-260K-10GGEI/830, W	White	Direct	3000 K	5500 lm (2500 - 5500 lm)	80	ø 600 mm × 87 mm	Opal diffuser	ON/OFF - Multiwatt	16,5 - 37,9 W		8596073433194
		191-260K-10GGEI/840, W	White	Direct	4000 K	5500 lm (2500 - 5500 lm)	80	ø 600 mm × 87 mm	Opal diffuser	ON/OFF - Multiwatt	15,7 - 36,4 W		8596073433200
		191-260K-10GGEI/830, B	Black	Direct	3000 K	5500 lm (2500 - 5500 lm)	80	ø 600 mm × 87 mm	Opal diffuser	ON/OFF - Multiwatt	16,5 - 37,9 W		8596073433354
		191-260K-10GGEI/840, B	Black	Direct	4000 K	5500 lm (2500 - 5500 lm)	80	ø 600 mm × 87 mm	Opal diffuser	ON/OFF - Multiwatt	15,7 - 36,4 W		8596073433361

Name	Picture	Code	Colour	Description	Use	EAN
Suspension set		00-00332, B	Black	Suspension set - 2000mm, 3 pcs. of wires, cable 4 × 0,75mm, ceiling cup	Optional accessories for suspending the luminaire	8595034327206
		00-00332, W	White	Suspension set - 2000mm, 3 pcs. of wires, cable 4 × 0,75mm, ceiling cup		8595034327213
		00-00334, B	Black	Suspension set - 2000mm, 3 pcs. of wires, cable 5 × 0,75mm, ceiling cup		8595034333993
		00-00334, W	White	Suspension set - 2000mm, 3 pcs. of wires, cable 5 × 0,75mm, ceiling cup		8595034333986
		00-00339, B	Black	Suspension set - 4000mm, 3 pcs. of wires, cable 4 × 0,75mm, ceiling cup		8596073034544
		00-00339, W	White	Suspension set - 4000mm, 3 pcs. of wires, cable 4 × 0,75mm, ceiling cup		8596073034568
		00-00341, B	Black	Suspension set - 4000mm, 3 pcs. of wires, cable 5 × 0,75mm, ceiling cup		8596073034605
		00-00341, W	White	Suspension set - 4000mm, 3 pcs. of wires, cable 5 × 0,75mm, ceiling cup		8596073034629

Note

The luminaires are supplied in a multiwatt version with the possibility to choose up to seven variants of luminous fluxes. We can set up the luminous flux for you for an extra payment within 2 working days or you can perform the settings yourself due to the programme in your PC and a special antenna or using a mobile application through the NFC technology. The luminous flux range is adjustable by 500 lm.



Rundo



Name	Picture	Code	Colour	Light distribution	Colour Temperature	Luminous flux	Colour rendering index Ra	Dimensions	Type of optical system	Connection	Power (W)	Additional information	EAN
Rundo		190-240K-10GGEI/830, W	White	Direct	3000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	8,1 - 30,2 W		8596073433910
		190-240K-10GGEI/840, W	White	Direct	4000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	7,7 - 29,1 W		8596073433941
		190-240K-10GGEI/830, B	Black	Direct	3000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	8,1 - 30,2 W		8596073433897
		190-240K-10GGEI/840, B	Black	Direct	4000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	7,7 - 29,1 W		8596073433927
		190-260K-10GGEI/830, W	White	Direct	3000 K	5500lm (2500 - 5500 lm)	80	ø 600 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	16,5 - 37,9 W		8596073434153
		190-260K-10GGEI/840, W	White	Direct	4000 K	5500lm (2500 - 5500 lm)	80	ø 600 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	15,7 - 36,4 W		8596073434184
		190-260K-10GGEI/830, B	Black	Direct	3000 K	5500lm (2500 - 5500 lm)	80	ø 600 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	16,5 - 37,9 W		8596073434139
		190-260K-10GGEI/840, B	Black	Direct	4000 K	5500lm (2500 - 5500 lm)	80	ø 600 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	15,7 - 36,4 W		8596073434160
		190-241K-10GGEI/830, W	White	Direct-indirect	3000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	9,2 - 30,8 W		8596073434696
		190-241K-10GGEI/840, W	White	Direct-indirect	4000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	9,2 - 29,5 W		8596073434702
		190-241K-10GGEI/830, B	Black	Direct-indirect	3000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	9,2 - 30,8 W		8596073434375
		190-241K-10GGEI/840, B	Black	Direct-indirect	4000 K	3500 lm (1000 - 3500 lm)	80	ø 400 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	9,2 - 29,5 W		8596073434382
		190-261K-10GGEI/830, W	White	Direct-indirect	3000 K	5500 lm (2500 - 5500 lm)	80	ø 600 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	24,6 - 54,1 W		8596073434733
		190-261K-10GGEI/840, W	White	Direct-indirect	4000 K	5500 lm (2500 - 5500 lm)	80	ø 600 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	23,2 - 51,4 W		8596073434740
		190-261K-10GGEI/830, B	Black	Direct-indirect	3000 K	5500 lm (2500 - 5500 lm)	80	ø 600 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	24,6 - 54,1 W		8596073434412
		190-261K-10GGEI/840, B	Black	Direct-indirect	4000 K	5500 lm (2500 - 5500 lm)	80	ø 600 mm × 62 mm	Opal diffuser	ON/OFF - Multiwatt	23,2 - 51,4 W		8596073434429

Name	Picture	Code	Colour	Description	Use	EAN
Suspension set		00-00332, B	Black	Suspension set - 2000mm, 3 pcs. of wires, cable 4 × 0,75mm, ceiling cup	Optional accessories for suspending the luminaire	8595034327206
		00-00332, W	White	Suspension set - 2000mm, 3 pcs. of wires, cable 4 × 0,75mm, ceiling cup		8595034327213
		00-00334, B	Black	Suspension set - 2000mm, 3 pcs. of wires, cable 5 × 0,75mm, ceiling cup		8595034333993
		00-00334, W	White	Suspension set - 2000mm, 3 pcs. of wires, cable 5 × 0,75mm, ceiling cup		8595034333986
		00-00339, B	Black	Suspension set - 4000mm, 3 pcs. of wires, cable 4 × 0,75mm, ceiling cup		8596073034544
		00-00339, W	White	Suspension set - 4000mm, 3 pcs. of wires, cable 4 × 0,75mm, ceiling cup		8596073034568
		00-00341, B	Black	Suspension set - 4000mm, 3 pcs. of wires, cable 5 × 0,75mm, ceiling cup		8596073034605
		00-00341, W	White	Suspension set - 4000mm, 3 pcs. of wires, cable 5 × 0,75mm, ceiling cup		8596073034629

Note

The luminaires are supplied in a multiwatt version with the possibility to choose up to seven variants of luminous fluxes. We can set up the luminous flux for you for an extra payment within 2 working days or you can perform the settings yourself due to the programme in your PC and a special antenna or using a mobile application through the NFC technology. The luminous flux range is adjustable by 500 lm.



Lina45-S



Name	Picture	Code	Colour	Light distribution	Colour Temperature	Luminous flux	Colour rendering index Ra	Dimensions	Type of optical system	Connection	Power (W)	Additional information	EAN
Lina45-S		45S-501I-25GGE/840, W	White	Direct-indirect	4000 K	4310 lm	80	1403 mm × 45 mm × 58 mm	Microprisma	ON/OFF	48 W		8596073382799

Name	Picture	Code	Colour	Description	Use	EAN
Wire suspension		00-00300, N	Nickel	2000mm	Necessary accessories (selection of two different variants)	8595034371438
		00-00301, N	Nickel	4000mm		8595034382694
Ceiling cup		00-00370, W	White	80 × 80 × 32 mm	Necessary accessories	8595034312868
Cable		00-00356, K	Limpid	5 × 0,75, 4000 mm	Necessary accessories (selection of two different variants)	8595034376549
		00-00355, K	Limpid	5 × 0,75, 2000 mm		8595034312844
End cap		45-50101, W	White	End cap - metal 2 ×, 5-conductor terminal box, grommet	Necessary accessories	8596073436492
Straight connector		45-50200, F	Zinc-coated		Optional accessories for connecting the luminaires to the system in line	8596073378723

Lipo35-S



Name	Picture	Code	Colour	Light distribution	Colour Temperature	Luminous flux	Colour rendering index Ra	Dimensions	Type of optical system	Connection	Power (W)	Additional information	EAN
Lipo35-S		35S-200K-25GGE/830, W	White	Direct	3000 K	2360 lm	80	1403 mm × 37 mm × 60 mm	Opal diffuser	ON/OFF	27,6 W	 	8596073368373
		35S-200K-25GGE/840, W	White	Direct	4000 K	2490 lm	80	1403 mm × 37 mm × 60 mm	Opal diffuser	ON/OFF	27,6 W		8596073368342

Name	Picture	Code	Colour	Description	Use	EAN
End cap		35-20101, W	White	Metal End cap - metal 2 ×, 5-conductor terminal box, grommet	Necessary accessories for the luminaire with inserted diffuser	8596073456902
End cap		35-20111, W	White	Metal End cap - metal 2 ×, 5-conductor terminal box, grommet	Necessary accessories for the luminaire with ejected diffuser	8596073456933
Wire suspension		35-00300, N	Nickel	2000 mm	Necessary accessories for the luminaire with ejected diffuser	8596073406716
Ceiling cup		00-00370, W	White	80 × 80 × 32 mm	Optional accessories	8595034312868
Cable		00-00355, K	Limpid	5 × 0,75, 2000 mm	Optional accessories for suspending the luminaire	8595034312844
		00-00356, K	Limpid	5 × 0,75, 4000 mm	Optional accessories for suspending the luminaire	8595034376549
Straight connector		35-00200, F	Zinc-coated		Optional accessories for connecting the luminaries to the system in line	8596073406709

Lipo60-S



Name	Picture	Code	Colour	Light distribution	Colour Temperature	Luminous flux	Colour rendering index Ra	Dimensions	Type of optical system	Connection	Power (W)	Additional information	EAN
Lipo60-S		04S-200K-25GGE/830, W	White	Direct	3000 K	3890 lm	80	1403 mm × 57 mm × 67 mm	Opal diffuser	ON/OFF	31 W		8596073268048
		04S-200K-25GGE/840, W	White	Direct	4000 K	4090 lm	80	1403 mm × 57 mm × 67 mm	Opal diffuser	ON/OFF	31 W		8596073212454
		04S-200I-25GGE/830, W	White	Direct	3000 K	3620 lm	80	1403 mm × 57 mm × 67 mm	Microprisma	ON/OFF	31 W		8596073262244
		04S-200I-25GGE/840, W	White	Direct	4000 K	3800 lm	80	1403 mm × 57 mm × 67 mm	Microprisma	ON/OFF	31 W		8596073212355

Name	Picture	Code	Colour	Description	Use	EAN
Wire suspension		00-00300, N	Nickel	2000mm	Necessary accessories (selection of two different variants)	8595034371438
		00-00301, N	Nickel	4000mm		8595034382694
End cap		04-20103, W	White	End cap - plastic 2x, 5-conductor terminal box, grommet		8596073160830
		04-20101, W	White	End cap - plastic 2x, 5-conductor terminal box, grommet		8596073107422
Set for suspension into 3-phase track		00-51300, W	White		Optional accessories for suspending into a 3f track for non-dimmable luminaires	8596073032892
Ceiling cup		00-00370, W	White	80 × 80 × 32 mm	Optional accessories	8595034312868
Cable		00-00356, K	Limpid	5 × 0,75, 4000 mm	Optional accessories for suspending the luminaire	8595034376549
		00-00355, K	Limpid	5 × 0,75, 2000 mm		8595034312844

Name	Picture	Code	Colour	Description	Use	EAN
Straight connector		04-00200, N	Nickel		Optional accessories for connecting the luminaires to the system in line	8596073107354
Ceiling fastening		00-00600, F	Zinc-coated		Optional accessories for surface-mounting of the luminaire	8595034382687
Frameless assembly set		04-20900, F	Zinc-coated		Optional accessories for installation of suspended type of profile as recessed trimless	8596073107361
Accessory for gear-tray release		04-01200, F	Zinc-coated		Optional accessoriesv	8596073140665
Wall fastening		00-20700, W	White	2 pieces	Optional assembly for wall assembly	8596073174714



Ture



Name	Picture	Code	Colour	Light distribution	Colour Temperature	Luminous flux	Colour rendering index Ra	Dimensions	Type of optical system	Connection	Power (W)	Additional information	EAN
Ture		58-001L-10GGV/830, W	White	Direct	3000 K	2200 lm (1300 - 2200lm)	80	ø 145 mm × 80 mm	Facet aluminium reflector	According to the selected electrical unit	9,1 - 17 W		8596073464785
		58-001L-10GGV/840, W	White	Direct	4000 K	2300 lm (1350 - 2300lm)	80	ø 145 mm × 80 mm	Facet aluminium reflector	According to the selected electrical unit	9,1 - 17 W		8596073464792
		57-001L-10GHV/830, W	White	Direct	3000 K	3250 lm (1300 - 3250lm)	80	ø 226 mm × 110 mm	Facet aluminium reflector	According to the selected electrical unit	9,1 - 23,2 W		8596073464822
		57-001L-10GHV/840, W	White	Direct	4000 K	3400 lm (1350 - 3400lm)	80	ø 226 mm × 110 mm	Facet aluminium reflector	According to the selected electrical unit	9,1 - 23,2 W		8596073464839
		56-001L-10GHV/830, W	White	Direct	3000 K	3250 lm (1300 - 3250lm)	80	ø 185 mm × 100 mm	Facet aluminium reflector	According to the selected electrical unit	9,1 - 23,2 W		8596073464808
		56-001L-10GHV/840, W	White	Direct	4000 K	3400 lm (1350 - 3400lm)	80	ø 185 mm × 100 mm	Facet aluminium reflector	According to the selected electrical unit	9,1 - 23,2 W		8596073464815

Name	Picture	Code	Luminous flux	Connection	Use	EAN
Electrical unit		00-00151E	~ 1300 lm	ON/OFF	Necessary accessories for functioning of the luminaire (choice of more variants)	8596073436546
		00-00152E	~ 2200 lm	ON/OFF		8596073436553
		00-00153E	~ 3300 lm	ON/OFF		8596073436560
		00-00153EI	~ 1300 - 3000 lm	ON/OFF - Multiwatt		8596073436577
		00-00155DI	~ 1300 - 4500 lm	DALI - Multiwatt		8596073436584

Name	Picture	Code	Type of optical system	Use	EAN
Plastic diffuser		58-001100, K	Opal	Optional accessories for particular luminaires: 58-001L-10GGV/830, W 58-001L-10GGV/840, W	8596073436539
Plastic diffuser		57-001100, K	Opal	Optional accessories for particular luminaires: 57-001L-10GHV/830, W 57-001L-10GHV/840, W	8596073362234
Plastic diffuser		56-001100, K	Opal	Optional accessories for particular luminaires: 56-001L-10GHV/830, W 56-001L-10GHV/840, W	8596073436515

Notes

Downlight luminaires are newly supplied in the following way: luminaire and electrical unit separately. The luminous fluxes values are optional in the given interval using SWITCH DIP switches on the ballast.

The luminaries are supplied in a multiwatt version with the possibility to choose up to seven variants of luminous fluxes. We can set up the luminous flux for you for an extra payment within 2 working days or you can perform the settings yourself due to the programme in your PC and a special antenna or using a mobile application through the NFC technology. The luminous flux range is adjustable by 500 lm.



Ravo



Name	Picture	Code	Colour	Light distribution	Colour Temperature	Luminous flux	Colour rendering index Ra	Dimensions	Type of optical system	Connection	Power (W)	Additional information	EAN
Ravo		55-070K-10GHV/830, W	White	Direct	3000 K	~2900 lm (1150 - 2900lm)	80	ø 172 mm × 85 mm	Opal diffuser	According to the selected electrical unit	9,1 - 23,2 W	 IP 40	8595034368230
		55-070K-10GHV/840, W	White	Direct	4000 K	~ 3050 lm (1200 - 3050lm)	80	ø 172 mm × 85 mm	Opal diffuser	According to the selected electrical unit	9,1 - 23,2 W	 UGR<19	8595034368216

Name	Picture	Code	Luminous flux	Connection	Use	EAN
Electrical unit		00-00151E	~ 1200 lm	ON/OFF	Necessary accessories for functioning of the luminaire (choice of more variants)	8596073436546
		00-00152E	~ 2000 lm	ON/OFF		8596073436553
		00-00153E	~ 3000 lm	ON/OFF		8596073436560
		00-00153EI	~ 1000 - 3000 lm	ON/OFF - Multiwatt		8596073436577
		00-00155DI	~ 1000 - 4500 lm	DALI - Multiwatt		8596073436584

Name	Picture	Code	Colour	Use	EAN
Black frame		55-000001, B	Black	Optional accessories	8596073436508
Frames for larger holes		55-000002, W	White	Optional accessories for fitting the luminaire into a hole up to 230 mm	8595034394987

Notes

Downlight luminaires are newly supplied in the following way: luminaire and electrical unit separately. The luminous fluxes values are optional in the given interval using SWITCH DIP switches on the ballast.

The luminaires are supplied in a multiwatt version with the possibility to choose up to seven variants of luminous fluxes. We can set up the luminous flux for you for an extra payment within 2 working days or you can perform the settings yourself due to the programme in your PC and a special antenna or using a mobile application through the NFC technology. The luminous flux range is adjustable by 500 lm.



Vali80-T



Name	Picture	Code	Colour	Light distribution	Colour Temperature	Luminous flux	Colour rendering index Ra	Dimensions	Type of optical system	Connection	Power (W)	Additional information	EAN
Vali80-T		179-600F-10GHE/930, W	White	Direct	3000 K	2830 lm	90	ø 80 mm × 160 mm	Reflector 32°	ON/OFF	33 W		8596073422891
		179-600F-10GHE/940, W	White	Direct	4000 K	2970 lm	90	ø 80 mm × 160 mm	Reflector 32°	ON/OFF	33 W		8596073422921
		179-600F-10GHE/930, B	Black	Direct	3000 K	2830 lm	90	ø 80 mm × 160 mm	Reflector 32°	ON/OFF	33 W		8596073422877
		179-600F-10GHE/940, B	Black	Direct	4000 K	2970 lm	90	ø 80 mm × 160 mm	Reflector 32°	ON/OFF	33 W		8596073422907

Name	Picture	Code	Use	EAN
Reflector 18°		00-01000	Optional accessories	8596073140962
Reflector 25°		00-01001		8596073140979
Reflector 32°		00-01002		8596073140986
Reflector 52°		00-01003		8596073140993